# **C-SERIES C14,000-C17,300**

COMBILIFT
LIFTING INNOVATION

The multi-directional forklift designed for the safe, space saving and productive handling of long and bulky loads.













# C-SERiES C14,000-C17,300

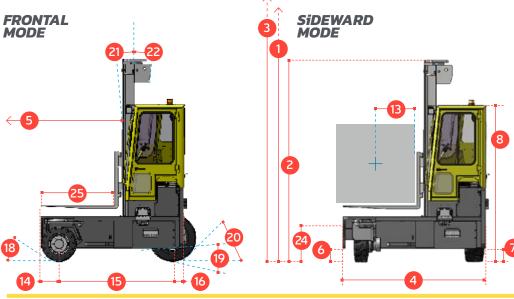

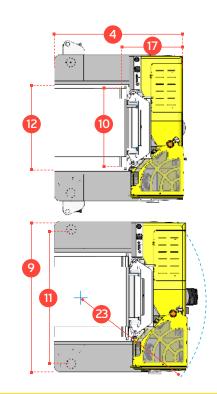

REF.	DESCRIPTION	C14,000	C17,300
1a	Standard Lift Height	178	
1b	Free Lift Height	0"	
2	Height Mast Closed	135"	
3	Max. (Mast Raised)	234"	
4	Overall Length	96"	105"
5	Mast Travel	51"	60"
6	Ground Clearance Under Mast	11"	
7	Ground Clearance to Wheelbase Center	6"	
8	Height Over Cab or of Overhead Guard	102"	
9	Width	110"	
10	Outside Spread of Fork Arms	63"	
11	Track Front	98"	
12	Frame Opening	65"	
13	Load Center Distance	24"	
14	Overhang Front	12"	
15	Wheel Base	76"	85"
16	Overhang Back	8"	
17	Length from Face of Fork	461/2"	
18	Approach Angle	45°	
19	Ramp Angle	29°	
20	Departure Angle	45°	
21	Forward Tilt	3°	
22	Backward Tilt	5°	
23	Minimum Outside Radius	100"	109"
24	Platform Height	291/2"	
25	Platform Length	49"	58½"
Α	Capacity	14,000 lbs	17,300 lbs
В	Unladen Weight	23,000 lbs	24,000 lbs
C	Maximum Ground Speed	9 mph	
D	Gradeability	15%	
E	Deutz Diseal Engine TCD3.6L4	74 HP	
F	Electrics	12 Volt	
G	Fork Sections 2" x 8" x	49" 58½"	
Н	23 x 10 - 12 Front Tire	OD 23" / Width 10"	
1	400 / 60 - 15 Rear Tire	OD 32" / Width 13"	
J	Standard Color	Green and Gray	
K	Suspension Seat	KAB Model 116	

## **Multi-Directional**



### Features Include:

- Rubber Mounted Half Open Cabin
- Multi-Direction Operation
- 3 Wheel Hydrostatic Drive
- Load Sensing Steering
- 4 Way Lever Positioning of Wheels
- · Hydraulic Oil Cooler

#### **Distributed by:**

European Patent No. 2167416; Brazilian Patent No. P10811954-6; Australian Patent No. 2008253242

COMBILIFT HAS A POLICY OF CONTINUOUS PRODUCT DEVELOPMENT AND RESERVES THE RIGHT TO ALTER SPECIFICATIONS WITHOUT PRIOR NOTICE. SPECIFICATIONS AND/OR DIMENSIONS MAY VARY FROM THOSE ILLUSTRATED IN SOME COUNTRIES